



PROJECT ESTIMATE

Front Yard Renovation

Concrete Pads, Turf, Steps, Block Wall & Lighting

PREPARED FOR

Brian Stampley

40206 Holden Circle
Temecula, California 92591
(805) 300-3413

ARIEL OUTDOOR RENOVATION

Class B General Building Contractor · Specializing in outdoor renovation

940 SF CONCRETE PADS · 870 SF ARTIFICIAL TURF · 75 LF BLOCK WALL · LED LIGHTING

DATE

June 17, 2026

ESTIMATE NO.

AOR-061726-S001

VALID FOR

30 Days

01 · SCOPE OF WORK

What We're Building

Your full front yard renovation, built start to finish by our own crews. Here is everything included in the project.

- 1

Driveway: Concrete Pads with Turf Joints

Concrete pads in a grid pattern, about 4 ft by 4 ft each, with 3 inch artificial turf strips between every pad. Includes demo of the existing surface, base prep and compaction, forming and pouring the pads, and setting the turf strips.

840 sf
- 2

Side Area Near House

Grade and level the area, then install concrete pads with turf strips in the same grid style as the driveway.

100 sf
- 3

Main Staircase

About 5 ft wide with a 7 ft run. The electrical is prepared under each step so warm white step lighting is ready to install (fixtures supplied by the client).

3 steps
- 4

Second Staircase Area

Two to three steps, about 7 ft long, with the electrical prepared for under step lighting (fixtures supplied by the client).

~16 ft
- 5

Block Wall

White smooth stucco finish for a modern look, with provisions for lights and planting pockets. Includes footing, block, grout, finish, and cap.

75 lf x 4 ft
- 6

Artificial Turf Area

Grade and level, plate compact the base, weed barrier, then install artificial turf with infill and edging.

870 sf
- 7

Tree Removal

Remove 3 palm trees (1 large and 2 medium), pull the stumps, and haul away all debris. We remove trees only and do not relocate or transplant live trees.

3 palms
- 8

Lighting: Electrical Prep Only

Conduit, wiring, and transformer hookup made ready for low voltage lighting (under step, path, and wall). Ariel does not supply any light fixtures; all fixtures are provided by the client.

see note
- 9

Planting Prep

Prepare planting pockets and areas along the block wall and walkways.

included
- 10

Demo & Disposal

Demo of all existing surfaces and haul away of all debris.

included

PLEASE NOTE

Light fixtures: Ariel prepares the electrical so the system is ready for low voltage lighting. We do not supply any light fixtures and make no commitment or warranty on fixtures. All fixtures are provided by the client.

Trees: We do not relocate or transplant live trees. Trees can only be removed and hauled away.

02 · INVESTMENT

Investment & Timeline

Hi Brian,

Below is the turnkey price for your full front yard renovation. It covers labor, materials, equipment, and on-site management for everything in the scope.

940 sf

Concrete Pads

870 sf

Artificial Turf

\$73,800

Total Investment

WHAT'S INCLUDED

- All labor, materials, and equipment.
- Demo and haul-off of the existing surfaces.
- Concrete pads with turf joints (driveway and side area).
- 870 sf artificial turf area.
- Two LED-lit staircases.
- 75 lf white block wall, footing to cap.
- Removal of 3 palm trees and stumps.
- Electrical prep for low voltage lighting (fixtures by client).
- Planting prep along the wall and walkways.

MATERIALS & SELECTIONS

Concrete Pads

Poured concrete pads in a 4 ft grid with 3 inch artificial turf joints.

Artificial Turf

Premium landscape grade synthetic turf, supplied and installed.

Block Wall

75 lf, 4 ft high, white smooth stucco finish, footing to cap.

Lighting

Electrical readied for low voltage lighting. Fixtures supplied by the client, not by Ariel.

TOTAL PROJECT INVESTMENT

Turnkey: labor, materials, equipment & management included.

\$73,800

TIMELINE About 3 weeks from start to final walkthrough, weather permitting.

PAYMENT SCHEDULE · PER CALIFORNIA CSLB RULES

Down payment limited to \$1,000 by law. Progress payments tied to on-site milestones.

#	MILESTONE	AMOUNT	%
1	Contract signing (down payment, CA cap \$1,000)	\$1,000	1.4%
2	Upon material delivery	\$35,000	47.4%
3	Upon demo & excavation	\$20,000	27.1%
4	Upon base & block wall completion	\$16,800	22.7%
5	Completion & final walkthrough	\$1,000	1.4%
TOTAL		\$73,800	100%

NOT INCLUDED

Light fixtures (supplied by client) · tree relocation or transplanting · permits beyond the block wall · HOA fees · drainage or utility relocation · furniture and accessories · any work outside this scope.

Questions? Call Jacob Hayon, Project Manager directly at (323) 513-4865 anytime.

Accepted by (client signature)

Date

This is an estimate, not a contract. Pricing valid 30 days from the cover date. A formal California home-improvement contract supersedes this document upon signing.

Ariel Outdoor Renovation · License #1129259 · (818) 390-7639 · Jacob Hayon, Project Manager

Page 3 of 4

03 · THE VISION

Before & After

Here is your front yard today next to the proposed design for each area, so you can picture exactly what we are building. After images are design renderings of the finished result.

Driveway

BEFORE



AFTER



House Frontage

BEFORE



AFTER




Side Walkway

BEFORE



AFTER

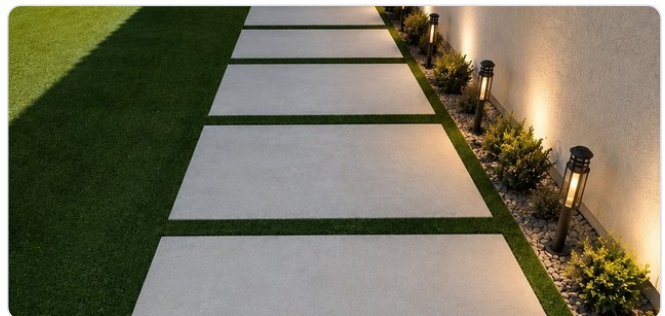

Main Entrance

BEFORE



AFTER

