



PROJECT ESTIMATE

Backyard Renovation

Pavers & Artificial Turf

PREPARED FOR

Maria Tarango

2699 Arches Court
Jurupa Valley, California 92509
(909) 224-8808

ARIEL OUTDOOR RENOVATION

Class B General Building Contractor · Specializing in outdoor renovation

DATE

June 5, 2026

ESTIMATE NO.

AOR-060526-S001

VALID FOR

30 Days

01 · DESIGN DIRECTION

Finished Look

Hi Maria,

Thank you for the opportunity to put together this estimate. Below is the finished aesthetic we walked through together, followed by the full scope, pricing, and timeline. Pricing covers labor, materials, equipment, and on-site management for everything shown.

2,720

SQ FT · Pavers

1,230

SQ FT · Artificial Turf

3,950

SQ FT · Total Area

FINISHED — HERO

drop photo here

PHOTO

drop photo here

PHOTO

drop photo here

Paver area — 2,720 sq ft

Angelus pavers (Sandstone Copper) set across the yard with a clean, level finish.

Turf area — 1,230 sq ft

Marathon synthetic grass over a compacted, draining base. Low maintenance, year-round green.

02 · SCOPE OF WORK

What's Included

Everything below is bundled into the price on page 6. Labor, equipment, debris haul-off, and on-site management are included.

#	PHASE	WORK INCLUDED
01	Site Clearing & Demo	Remove existing grass, debris, and old surfacing across the work area. Haul off and dispose.
02	Grading & Base Prep	Cut, fill, and compact the sub-grade. Lay and compact a draining aggregate base to spec.
03	Paver Installation	Set 2,720 sq ft of Angelus pavers (Sandstone Copper) over bedding sand with proper slope for drainage; cut, seat, and compact.
04	Artificial Turf	Install 1,230 sq ft of Marathon synthetic grass over the prepared base; seam, stake, and infill for a natural look.
05	Edging & Borders	Install concrete or paver borders to lock the field in place and keep clean transitions.
06	Final Detailing	Joint sand, power-wash, blow-off, and final walkthrough. Site left clean and punch-list closed.

MATERIALS & SELECTIONS

Pavers: Angelus Pavilion / Paseo, color Sandstone Copper — supplied & installed.

Artificial Turf: Marathon synthetic grass, premium landscape grade — supplied & installed.

Base & Edging: Compacted, draining aggregate base under both surfaces, with concrete / paver borders.

HOW WE DO THE JOB

- Compacted, draining aggregate base under everything.
- Proper slope so water runs off, never pools.
- Edges locked with borders so nothing shifts.
- Site cleaned and hauled off when we leave.

LICENSED, INSURED, SPECIALIZED

- CSLB License #1129259, Class B General Building.
- Outdoor renovation only: paving, fencing, hardscape.
- General liability and workers' comp on file.

03 · SITE TODAY VS. FINISHED

Before & After


The backyard is structurally sound but unfinished. Below is what each area looks like today next to how it will look once the work is complete.

BEFORE



Graded dirt around the new pool, ready for base.

AFTER

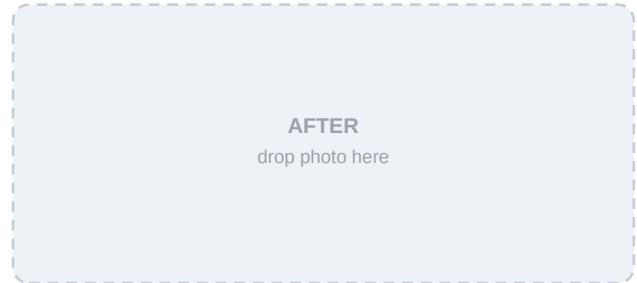


Turf lawn and a clean pool deck.

BEFORE



Open dirt along the house, no surfacing yet.

AFTER

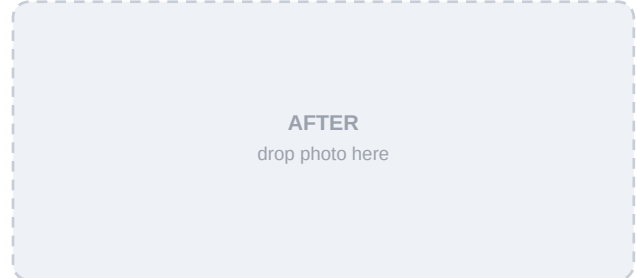

Pavers run clean to the pool and house.

HOW THE BASE GOES DOWN

We grade and compact the sub-grade, then lay and compact a draining aggregate base before any pavers or turf go in. A solid base is what keeps the finished surface flat and stops settling over time.

04 · MORE ANGLES

Side Yard, Right Side & Corners


More angles. Each shows the area as it is today next to the same angle once finished.

BEFORE



Bare ground along the fence.

AFTER

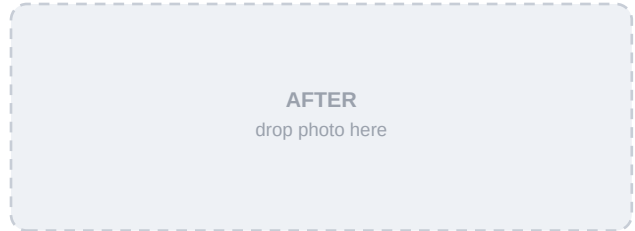


Pavers / turf with accent lighting.

BEFORE



Open dirt beside the pool.

AFTER

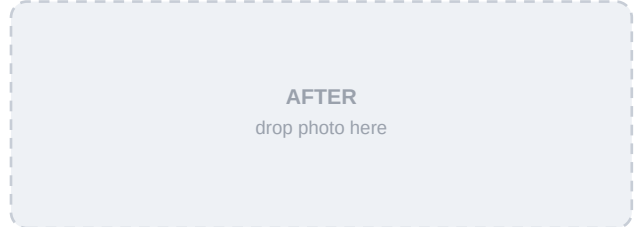


Clean deck running to the coping.

BEFORE



Wide dirt area by the fire pit.

AFTER

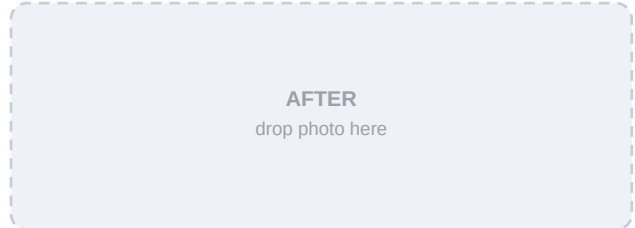

Paved patio, crisp borders.

05 · INVESTMENT

Pricing & Terms

TOTAL PROJECT INVESTMENT

\$70,300

Full backyard — pavers + turf. Labor, materials, equipment & management included.

Payment Schedule

Structured per California CSLB rules. Down payment limited to \$1,000 by law. Progress payments are tied to milestones on site.

#	MILESTONE	AMOUNT	%
1	Contract signing — down payment (CA-capped at \$1,000)	\$1,000	1.4%
2	Upon commencement / mobilization	\$1,000	1.4%
3	Material order & delivery	\$34,150	48.6%
4	Upon demolition complete	\$20,490	29.1%
5	Upon base complete	\$13,660	19.4%
TOTAL		\$70,300	100%

OPTIONAL SCOPES

\$70,300

Full backyard — pavers + turf

Recommended · best price

\$14,000

Artificial turf only — 1,230 sq ft

Marathon synthetic grass

\$8,000

Turf — smaller 600 sq ft area

Partial turf option

TIMELINE

~2 weeks

From start to final walkthrough for the full project. Schedule depends on weather and material lead times. A weekly schedule is shared at contract signing.

NOT INCLUDED

- Permits & HOA fees (if any)
- Drainage / utility relocation
- Outdoor kitchen, BBQ, gas lines
- Furniture & accessories
- Work outside this scope



We Look Forward to Working With You

NEXT STEPS

Call **Jacob** at **(323) 513-4865** with any questions or to move forward. We will schedule an in-person meeting to sign the formal contract, which includes the California Mechanics Lien Warning, the 3-day Right to Cancel notice, and full CSLB disclosures.

ABOUT ARIEL

We hold a California CSLB **Class B General Building** license, but by choice we work only on outdoor projects: paving, fencing, outdoor kitchens, and hardscape. Specialization is what keeps our work tight and our timelines predictable.

This is an estimate, not a contract. Pricing valid 30 days from the cover date. A formal home-improvement contract supersedes this document upon signing.