



PROJECT ESTIMATE

Driveway, Walkway & Backyard Paver Installation

Premium Hardscape · Gray Moss Charcoal / Charcoal Border

PREPARED FOR

Mike Irvine

42784 Trail Blaze Pass
Murrieta, California 92562

(951) 677-6787

ARIEL OUTDOOR RENOVATION

Class B General Building Contractor · Specializing in outdoor renovation

3,215 SQ FT PAVERS · DRIVEWAY, WALKWAY & BACKYARD · GRAY MOSS CHARCOAL / CHARCOAL BORDER

DATE

June 16, 2026

ESTIMATE NO.

AOR-061626-S001

VALID FOR

30 Days

01 · PROJECT OVERVIEW & INVESTMENT

Project Overview

Hi Mike,

Thank you for the opportunity to put this together. Below is the full scope, materials, and pricing for your paver installation. The price covers labor, materials, equipment, and on-site management for everything shown.

3,215

SQ FT · Pavers

3 Areas

Driveway · Walkway · Yard

\$60,000

Total Investment

SCOPE OF WORK · WHAT'S INCLUDED

- Site clearing & demo — remove existing surfacing; haul off & dispose.
- Grading & base prep — cut, fill & compact draining aggregate base to spec.
- Paver install — set 3,215 sq ft over bedding sand, sloped for drainage.
- Charcoal soldier-course border on driveway, walkway & patio edges.
- Edge restraints to lock the field for clean, permanent transitions.
- Final detailing — polymeric joint sand, compaction, wash & walkthrough.

MATERIALS & SELECTIONS

Pavers

Premium interlocking concrete pavers, Gray Moss Charcoal blend. Supplied & installed by Ariel.

Border

Solid Charcoal soldier-course banding framing all paved areas.

Base & Edging

Compacted, free-draining aggregate base with concrete / paver edge restraints.

Coverage

3,215 sq ft total across the front entrance, walkway, and backyard.

TOTAL PROJECT INVESTMENT

Labor, materials, equipment & on-site management included.

\$60,000

PAYMENT SCHEDULE · PER CALIFORNIA CSLB RULES

Down payment limited to \$1,000 by law. Progress payments tied to on-site milestones.

#	MILESTONE	AMOUNT	%
1	Contract signing (down payment, CA cap \$1,000)	\$1,000	1.7%
2	Upon material delivery	\$29,000	48.3%
3	Upon demo & excavation	\$17,500	29.2%
4	Upon base completion	\$11,500	19.1%
5	Completion & final walkthrough	\$1,000	1.7%
TOTAL		\$60,000	100%

NOT INCLUDED

Permits & HOA fees · drainage / utility relocation · outdoor kitchen, BBQ & gas lines · furniture · any work outside this scope.

Accepted by (client signature)

Date

This is an estimate, not a contract. Pricing valid 30 days from the cover date. A formal California home-improvement contract supersedes this document upon signing.

02 · OUR WORK

Before & After

Six recent projects from our crews — each shown before and after, from the same angle. This is the craftsmanship and finish you can expect on your driveway, walkway, and backyard.

Main Driveway — View Toward the Street BEFORE

AFTER

**Driveway at the Garage** BEFORE

AFTER

**Side Walkway — Iron Gate** BEFORE

AFTER



03 · OUR WORK

Before & After (continued)

Front Walkway — Rose Bed

BEFORE




AFTER




Entry Landing

BEFORE

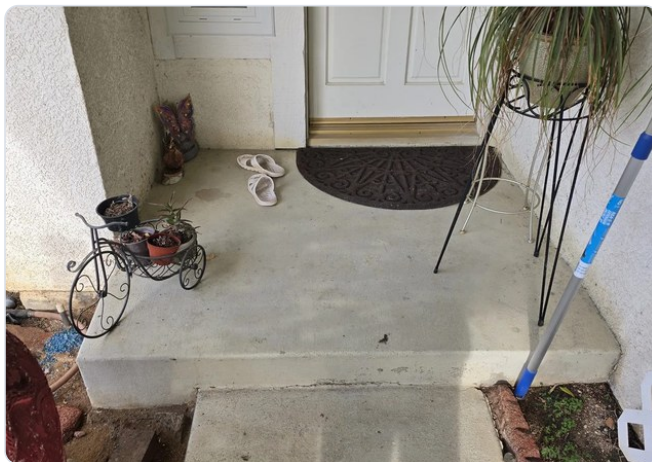

AFTER

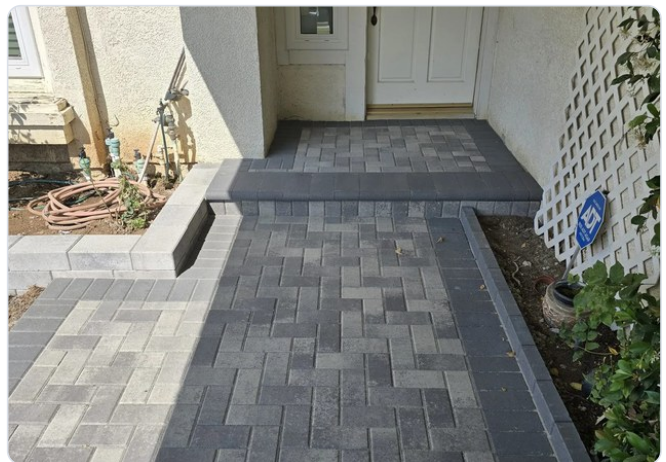

Side Garden Bed — Paver Edging

BEFORE



AFTER

