



PROJECT ESTIMATE

Driveway, Walkway & Backyard Paver Installation

Premium Hardscape · Gray Moss Charcoal / Charcoal Border

PREPARED FOR

Mike Irvine

42784 Trail Blaze Pass
Murrieta, California 92562

(951) 677-6787

ARIEL OUTDOOR RENOVATION

Class B General Building Contractor · Specializing in outdoor renovation

3,215 SQ FT PAVERS · DRIVEWAY, WALKWAY & BACKYARD · GRAY MOSS CHARCOAL / CHARCOAL BORDER

DATE

June 16, 2026

ESTIMATE NO.

AOR-061626-S001

VALID FOR

30 Days

01 · SCOPE OF WORK

How We Build It

Every job is built start to finish by our own crews. Here is how your pavers go in, step by step.

- 1 Demolition and removal of the existing surface.
- 2 Apply the gravel base mix over the soil.
- 3 Grade level and compact the base.
- 4 Apply the bedding sand and compact.
- 5 Install the pavers across all 3,215 sq ft.
- 6 Cut the perimeter frame and set the special Charcoal border stones in the contrasting color.
- 7 Apply polymeric joint sand.
- 8 Compact the polymeric sand into the joints.
- 9 Clean all the pavers. The job is complete.

ABOUT ARIEL

Ariel Outdoor Renovation holds a California Class B General Building license, but we focus only on outdoor work. That is what makes what we do every day different. The crews we build with already bring over 20 years of real experience in paver installation.

02 · OVERVIEW & INVESTMENT

Project Overview

Hi Mike,

Thank you for the opportunity to put this together. Below is the full scope, materials, and pricing for your paver installation. The price covers labor, materials, equipment, and on-site management for everything shown.

3,215

SQ FT · Pavers

3 Areas

Driveway · Walkway · Yard

\$60,000

Total Investment

WHAT'S INCLUDED

- All labor, materials, and equipment for the full install.
- Demolition and haul-off of the existing surfaces.
- 3,215 sq ft of pavers across the driveway, walkway, and backyard.
- Cement-set Charcoal border around every paved area.
- Full base prep, polymeric sand, and final cleaning.
- On-site project management from start to walkthrough.

MATERIALS & SELECTIONS

Pavers

Premium interlocking concrete pavers, Gray Moss Charcoal blend. Supplied & installed by Ariel.

Border

Solid Charcoal soldier-course banding framing all paved areas.

Base & Edging

Compacted, free-draining aggregate base with concrete / paver edge restraints.

Coverage

3,215 sq ft total across the front entrance, walkway, and backyard.

TOTAL PROJECT INVESTMENT

Labor, materials, equipment & on-site management included.

\$60,000

PAYMENT SCHEDULE · PER CALIFORNIA CSLB RULES

Down payment limited to \$1,000 by law. Progress payments tied to on-site milestones.

#	MILESTONE	AMOUNT	%
1	Contract signing (down payment, CA cap \$1,000)	\$1,000	1.7%
2	Upon material delivery	\$29,000	48.3%
3	Upon demo & excavation	\$17,500	29.2%
4	Upon base completion	\$11,500	19.1%
5	Completion & final walkthrough	\$1,000	1.7%
TOTAL		\$60,000	100%

NOT INCLUDED

Permits & HOA fees · drainage / utility relocation · outdoor kitchen, BBQ & gas lines · furniture · any work outside this scope.

Accepted by (client signature)

Date

Questions? Call Jacob Hayon, Project Manager directly at (323) 513-4865 anytime.

This is an estimate, not a contract. Pricing valid 30 days from the cover date. A formal California home-improvement contract supersedes this document upon signing.

Ariel Outdoor Renovation · License #1129259 · (818) 390-7639 · Jacob Hayon, Project Manager

Page 3 of 5

03 · OUR WORK

Before & After

Six recent projects from our own crews, each shown before and after from the same angle. This is the craftsmanship and finish you can expect on your driveway, walkway, and backyard.

Main Driveway (Street View)

BEFORE



AFTER



Driveway at the Garage

BEFORE



AFTER



Side Walkway & Iron Gate

BEFORE



AFTER



04 · OUR WORK

Before & After (continued)

Front Walkway & Rose Bed

BEFORE




AFTER




Entry Landing

BEFORE

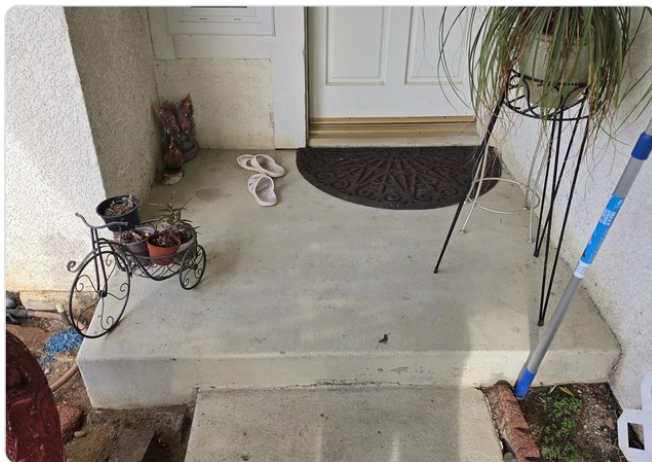


AFTER

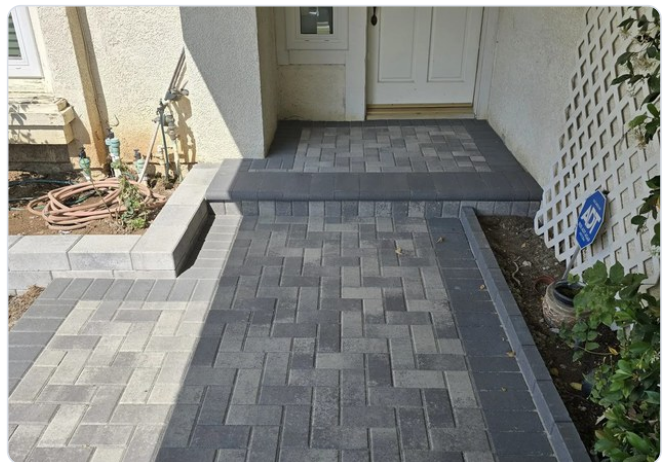

Side Garden Bed & Paver Edging

BEFORE

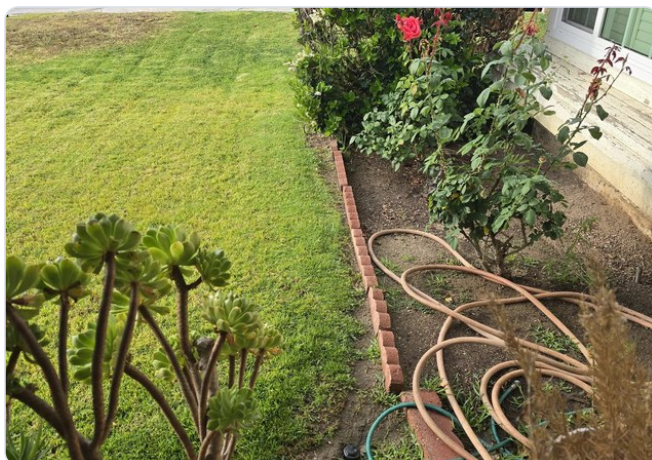

AFTER

